

DSE9140/9260

SWITCH MODE BATTERY CHARGERS

10 AMP 12 & 24 VOLT OPTIONS

FEATURES



The DSE 10 Amp Switch Mode Battery Chargers are designed to be permanently connected to a battery, keeping it charged to maximum capacity. The chargers can be mounted to the chassis or panel using the fixing points or optional DIN rail clips.

The chargers' stylish design includes two LED indicators on the front to show when the charger is connected to the mains/utility supply and to indicate when a fault condition occurs.

The chargers do not include any moving parts to give added durability and reliability. They will also continue to operate during cranking and running. Both chargers can also accept multiple voltage connections.

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +55 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm,
8 Hz to 500 Hz @ 2 gn


HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours

SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

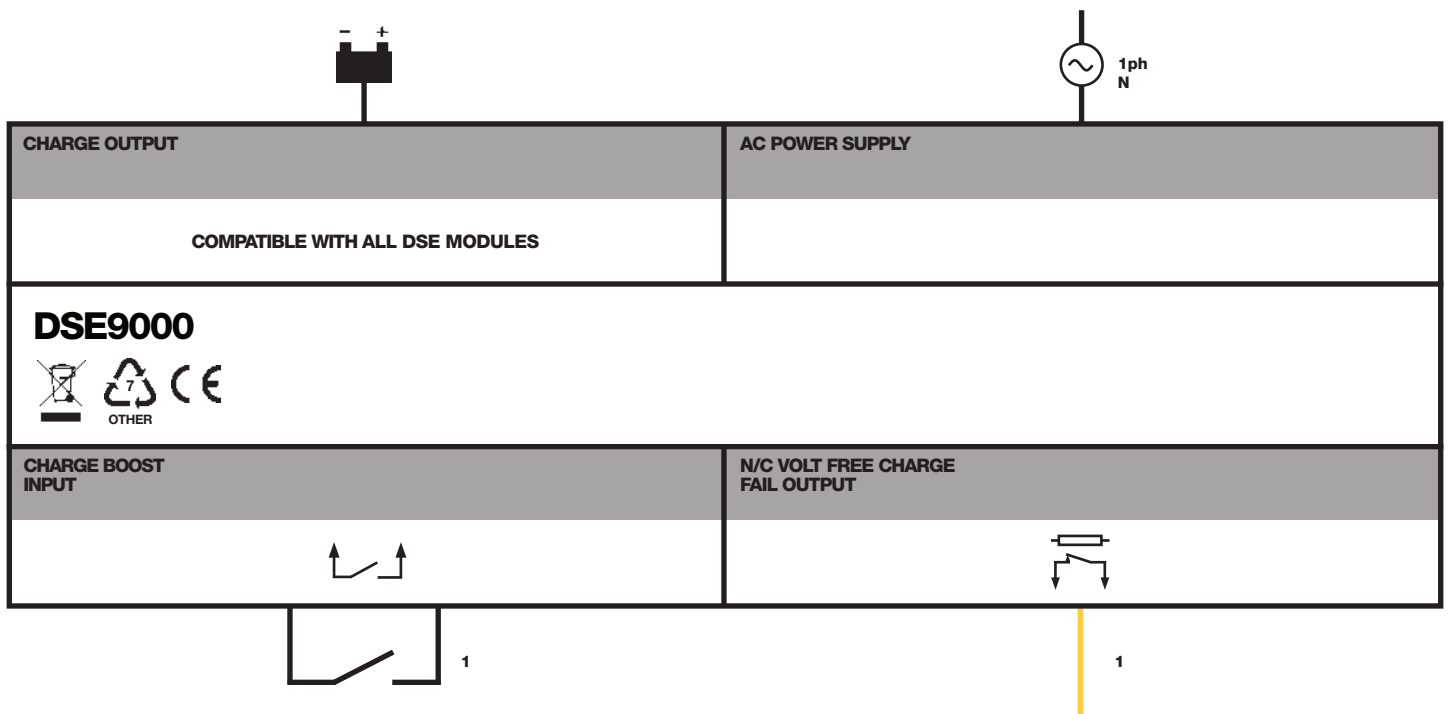


DSE9140/9260

SWITCH MODE BATTERY CHARGERS

10 AMP 12 & 24 VOLT OPTIONS

FEATURES

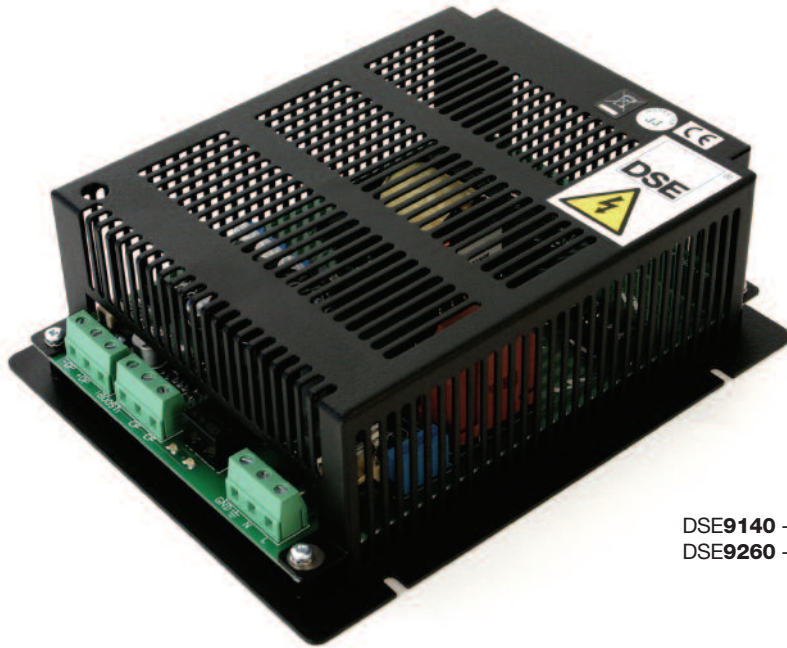

DSE9140 - 10 A 12 V
DSE9260 - 10 A 24 V

ADVANCED FEATURES

Multi-Stage Intelligent Charging

- Constant current- Maximum current available during charge recovery phase
- Constant voltage
- Chargers automatically return to float mode when charging is complete

Low Output Ripple

- Makes the chargers ideal for all battery types

Full Protection

- Reverse polarity protection, short circuit protection and current limiting
- Automatic recovery after the removal of fault conditions

Boost Mode

- Boosts and equalises cell charge improving battery performance and life
- Simple boost connection using on-board terminals

Power Save Mode

- Once the battery is fully charged the chargers switch to Eco-Power to save energy

KEY BENEFITS

- Suitable for a wide range of battery types
- No moving parts for longer battery charger life
- Switched mode design
- Charger fail output
- Minimum 80% efficiency throughout full operating range

SPECIFICATION

AC SUPPLY

VOLTAGE RANGE
90 V to 305 V (L-N)

FREQUENCY RANGE

48 Hz to 64 Hz (L-N)

DC OUTPUT

DSE9140 OUTPUT

10 A DC 12 V DC at 13.7 V DC

DSE9260 OUTPUT

10 A DC 24 V DC at 27.6 V DC

RIPPLE AND NOISE

<1%

EFFICIENCY

>80%

REGULATION

LINE
<1% Vo

LOAD

<2% Vo

PROTECTIONS

Short Circuit
Over Current
Reverse Polarity

DIMENSIONS

DSE9140 & DSE9260 DIMENSIONS

152 mm x 188 mm x 62 mm
6" x 7.4" x 2.44"

DSE9140 WEIGHT

0.7 kg

DSE9260 WEIGHT

0.8 kg

RELATED MATERIALS

TITLE

DSE9000 Series Installation Instructions
DSE9000 Series Operator Manual

PART NO'S

053-049
057-085

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com